




PAC8000 Controller With IS I/O System Architecture

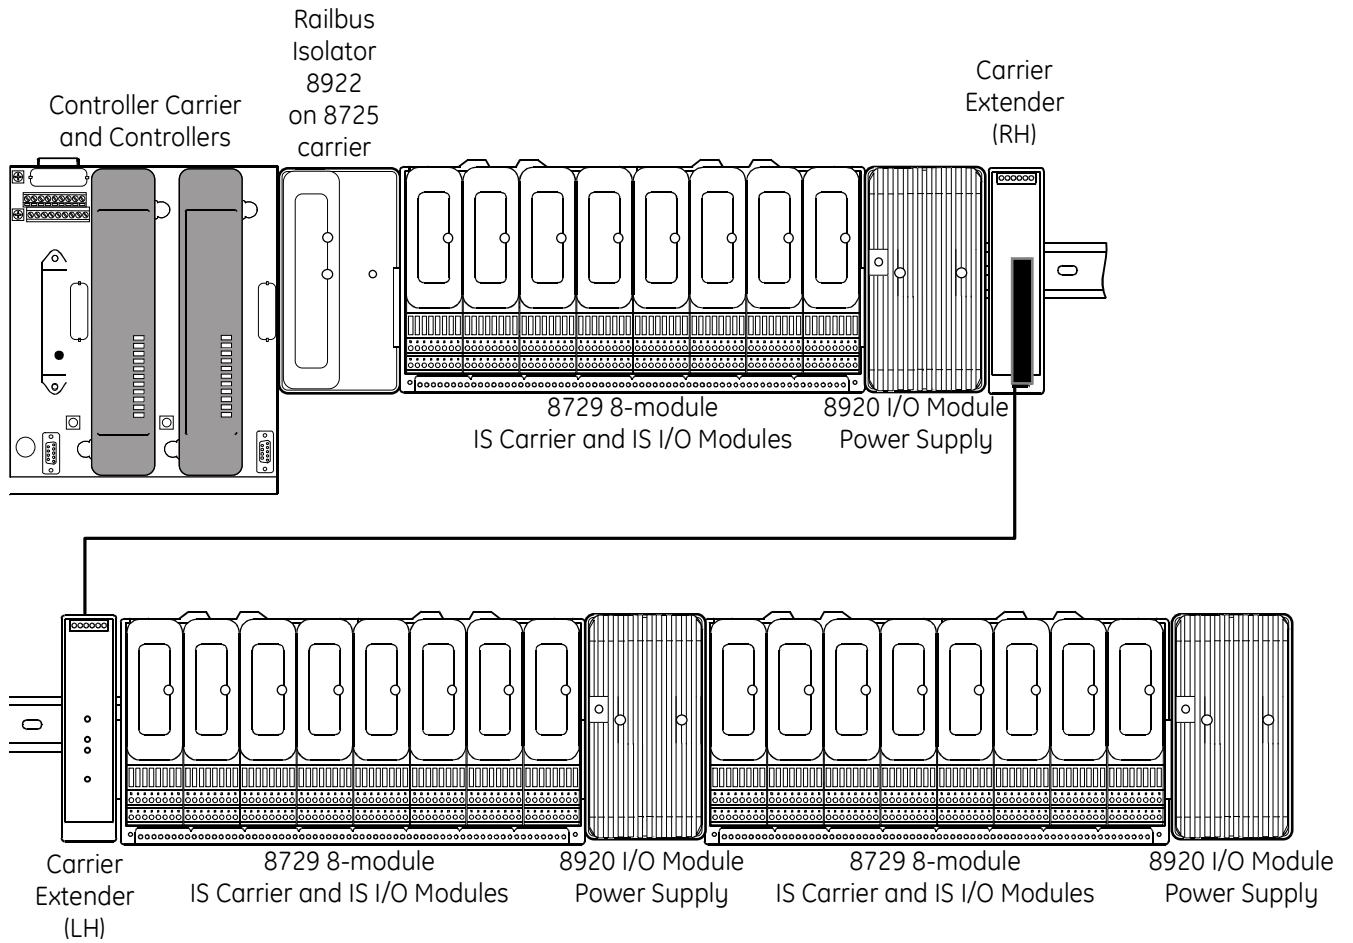

Notes

- Controllers each have duplex Ethernet port (Modbus TCP Server), simplex serial port (Modbus RTU master)
- Maximum 64 I/O modules per node
- Maximum distance of Railbus 6.5 metres
- 8920 Power Supply mandatory for IS applications
- Mixed 2/2 and 2/1 application allowed provided all 2/2 I/O to left of Railbus Isolator (2/2 Power Supplies not shown)